


DRYLOK® 2300 Static Shielding /Moisture Barrier Bag



Advantek's DRYLOK® 2300 Static Shielding/Moisture Barrier Bag is engineered to protect contents from electro-static shock and moisture. Its tough 7.0mil construction prevents punctures, safeguards static- and moisture-sensitive devices during transport and storage. DRYLOK® 2300 is available in several standard sizes designed to contain matrix trays, tubes and 13" shipping reels. Need other sizes? We can make custom bags to fit the needs of nearly any project.

- > 7.0mil thick with multiple layers of metalized polyester creates an exceptional dry package with superior performance
- > Meets requirements of EIA 541 and IPC/JEDEC J-STD-033

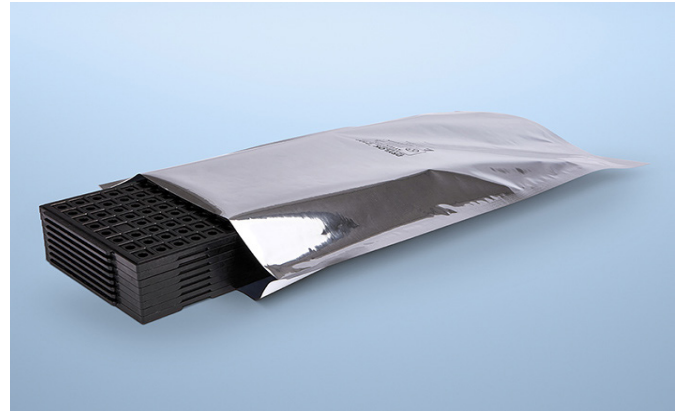


Material Properties

Property	Typical Value	Test Method
Thickness	7.0 mils	N/A
Puncture Resistance	>30lbs	FTMS 101C, Method 2065.1
MVTR	<0.005 grams/100sq.inch	ASTM F 1249
Seam Strength	Pass	MIL-PRF-81705
Heat Sealing Conditions	300 - 400°F 0.6 - 4.5 seconds 30 - 70 PSI	-
Surface Resistivity	≥1.0E5, <1.0E12 Ohms/sq.	ASTM D 257
Static Decay	< 2 Seconds	EIA 541
Static Shielding	< 20 nJ	STM 11.31

Note: These values presented for this product are typical laboratory data and may be changed without notice. You should determine products suitability based upon your own internal test and criteria.

Construction

DRYLOK® 2300 Static Shielding/Moisture Barrier Bags are constructed in five layers. This cross-section depicts the layer order from outermost to innermost layers, a static dissipative polyester layer, aluminum shield, polyester, aluminum shield and static dissipative polyethylene layer.



Configurations

DRYLOK® 2300 Static Shielding/Moisture Barrier Bags are available in custom sizes or in several industry standard sizes designed for 13" reels, matrix trays and tubes. Bags are offered in a 2-seal configuration with a bottom fold or a 3-seal configuration, with our standard Advantek hot-stamp or your company's hot-stamp or flexographically printed logo, or in inner printing.

Shelf Life and Storage

DRYLOK® 2300 bags are recommended to be used within 2 years from the date of manufacture. Store this product in its original packaging in a climate-controlled environment where temperature ranges from 21°C ± 16°C (70°F ± 29°F) and relative humidity is 50% ± 30%.

Typical Bag Configuration

