


# DRYLOK® 3500 Static Shielding /Moisture Barrier Bag



Advantek's DRYLOK® 3500 Static Shielding/Moisture Barrier Bag is engineered for maximum protection of sensitive components from electro-static shock and moisture. DRYLOK® 8850 bags are available in several standard sizes designed to contain matrix trays, tubes and 13" shipping reels. Need other sizes? We can make custom bags to fit the needs of nearly any project.

- > Low Moisture Vapor Transmission Rate to provide superior protection for moisture-sensitive device
- > High puncture resistance for strong physical protection
- > Meets requirements of EIA 541 and IPC/JEDEC J-STD-033

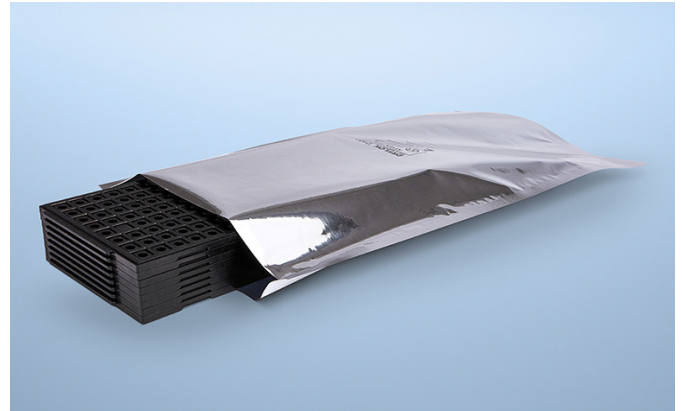


## Material Properties

Property	Typical Value	Test Method
Thickness	6 mils	N/A
Puncture Resistance	25lbs	FTMS 101C, Method 2065.1
MVTR	<0.0003 grams/100sq.inch	ASTM F 1249
Seam Strength	20lb	ASTM D 1876
Heat Sealing Conditions	300 - 400°F 0.6 - 4.5 seconds 30 - 70 PSI	-
Surface Resistivity	≥1.0E5, <1.0E12 Ohms/sq.	ASTM D 257
Static Decay	< 2 Seconds	EIA 541
Static Shielding	< 20 Volts	EIA 541

Note: These values presented for this product are typical laboratory data and may be changed without notice. You should determine products suitability based upon your own internal test and criteria.

## Construction

DRYLOK® 3500 Static Shielding/Moisture Barrier Bags are constructed in four layers. These layers consist of a static dissipative polyester outer layer, Nalyon, aluminum foil and static dissipative polyethylene inner layer.



## Configurations

DRYLOK® 3500 Static Shielding/Moisture Barrier Bags are available in custom sizes or in several industry standard sizes designed for 13" reels, matrix trays and tubes. Bags are offered in a 2-seal configuration with a bottom fold or a 3-seal configuration. Marking options include our standard Advantek hot-stamp, your company's hot-stamp or a flexographic printed logo.

## Shelf Life and Storage

DRYLOK® 3500 bags are recommended to be used within 2 years from the date of manufacture. Store this product in its original packaging in a climate-controlled environment where temperature ranges from 21°C ± 16°C (70°F ± 29°F) and relative humidity is 50% ± 30%.

Typical Bag Configuration

